


ESM-7750

"Smart IO Module" Process Controller

ESM-7750

- 8 steps profile control (Ramp & Soak) function and start-hold-stop by using logic input module
- For process value and process control
- Retransmission feature
- Detection of heater failure by using 0...5Adc CT input module
- Universal process input (TC, RTD, mVdc, Vdc, mAdc)
- Bumpless transfer
- Motorized valve control function
- 4 Digits process (PV) and 4 Digits set (SV) display
- Programmable heating, cooling and alarm functions for control outputs
- Auto-tune and Self-tune PID
- Dual or multi point calibration for dc Voltage or Current input

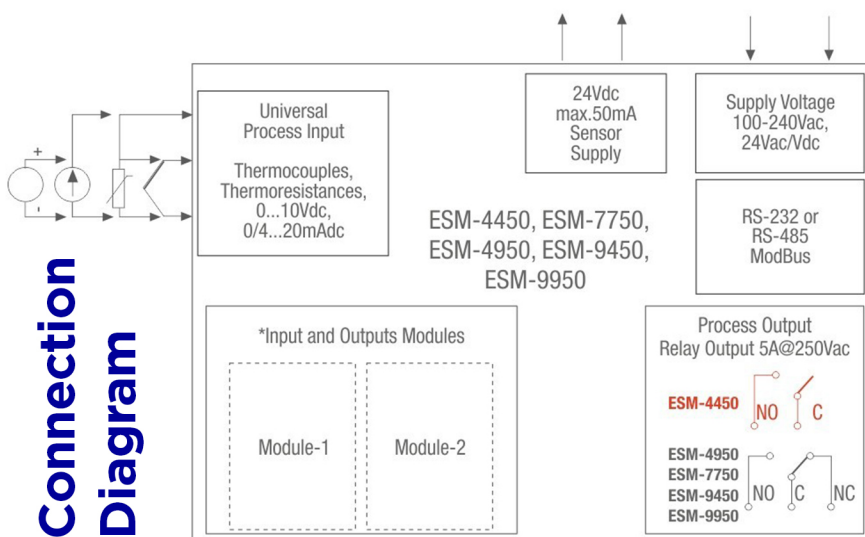

PT MULTI MAKMUR TEKNIKATAMA

Phone: +62 21 54350091 | +62 21 54350092 | +62 21 54350181

Mobile WA: +62 878 6314 1371 | Fax: +62 21 54350182

Email: admin@multimakmur.co.id | Website: www.multimakmur.co.id



Features	Descriptions
Physical Features	
Dimensions	72 mm x 72 mm 87.5 mm
Protection Class	NEMA 4X (IP65 at front, IP20 at rear)
Installation	Fixed Installation
Storage / Operating Temperature	0..50°C
Storage / Operating Humidity	90 % max. (None condensing)
Electrical Features	
Supply Voltage and Power	100-240 Vac (-15%,+10%) 50/60 Hz. 6 VA 24 Vac (-15%,+10%) 50/60 Hz. 6 VA 24 Vdc (-15%,+10%) 6 W
Sensor Inputs	Universal Input TC, RTD, Voltage/Current (dc) Selectable by configuration parameters L (DIN43710), J, K, R, T, S, B, E, N (IEC584.1) (ITS90) PT100 (IEC751) (ITS90) Selectable by configuration parameters 0-50 mV, 0-5 V, 0-10 V Selectable by configuration parameters 0-20 mA, 4-20 mA
Optional Sensor Inputs	EMI-700 Dijital Input Module EMI-710 0/4-20mA Current Input Module EMI-720 CT 0-5A Input Module EMI-730 TC veya 0..50mVdc Input Module EMI-740 PT-100 Input Module EMI-750 0-10Vdc Input Module
Scale	
Accuracy	± 0,25% of full scale for Thermocouple ,Thermoresistance, and Voltage
Output	
Relay Output	5A@250 Vac at resistive load
SSR Output	
Analogue Output	
Optional Outputs	EMO-700 Relay Output Module (3A@250V) EMO-710 SSR Output Module (20mA@18V) EMO-720 Dijital (Transistor) Output Module (40mA@18V) EMO-730 0/4-20mA Current Output Module
Control	
Control Form	On / Off, P, PI, PD, PID
Reading Frequency	3 readings per second
Communication Protocols	MODBUS-RTU
Approvals	UL Recognized Component (File No : E 254103), GOST-R, CE

