



# TT-Head

## Head Mount Temperature Transmitter

- ✓ Sensor type **flexibility**
- ✓ Excellent **robustness** against interferences
- ✓ Fully **rangeable**
- ✓ Field **calibration** fine tuning

CE RoHS



TT-Head is an excellent and powerful high-accuracy loop-powered head mounted temperature transmitter. It accepts several types of sensors – thermocouples, Pt100, Pt1000, NTC and 0-50 mV signal – all-in-one model, with linearized 4-20 mA output and configurable measurement range. It allows 2 points calibration for field tuning and can be

supplied also with accredited calibration certificate according to ILAC recognition, and additionally can be supplied already preconfigured with customer parameters. As a world class device, TT-Head is compliant with the leading standards of electromagnetic compatibility, and is highly immune and reliable device for industrial environment.

## APPLICATION



**Food and  
Beverages  
Industry**



**Pharmaceutical  
Industry**



**Animal Feed  
Industry**

For more information, contact us




**PT MULTI MAKMUR TEKNIKATAMA**

**p** (+62 21) 543 500 91  
 (+62 21) 543 500 92  
 (+62 21) 0811178954

**f** (+62 21) 543 501 82  
**e** [rdn@cbn.net.id](mailto:rdn@cbn.net.id)  
**w** [multimakmur.co.id](http://multimakmur.co.id)



## DIMENSION

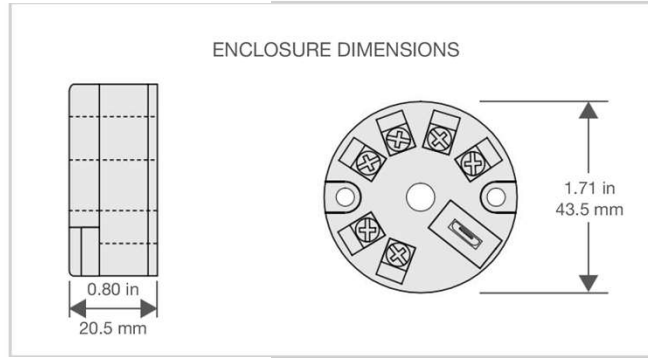

## SPECIFICATION

Sensor Input	Sensor Type	Measurement Range	
	Thermocouple K	-150 to 1370 °C	(-238 to 2498 °F)
	Thermocouple J	-100 to 760 °C	(-148 to 1400 °F)
	Thermocouple R	-50 to 1760 °C	(-58 to 3200 °F)
	Thermocouple S	-50 to 1760 °C	(-58 to 3200 °F)
	Thermocouple T	-160 to 400 °C	(-256 to 752 °F)
	Thermocouple N	-270 to 1300 °C	(-454 to 2372 °F)
	Thermocouple E	-90 to 720 °C	(-130 to 1328 °F)
	Thermocouple B	500 to 1820 °C	(932 to 3308 °F)
	Pt100 (2-wire, 3-wire and 4-wire)	-200 to 650 °C	(-328 to 1202 °F)
Pt100 (3-wire)	-200 to 650 °C	(-328 to 1202 °F)	
NTC (2-wire)	-30 to 120 °C	(-22 to 248 °F)	
	0-50 mV	0 to 50 mV	
Temperature Unit	°C or °F, software selectable		
Accuracy	Sensor Type	Typical	Minimum
	Pt100 / Pt1000 (-150 to 400 °C) or (-238 to 752 °F)	0.10%	0.12%
	Pt100 / Pt1000 (Full Range)	0.13%	0.19%
	Tc K, J, T, E, N, R, S, B	0.1% ±1 °C (±1.8 °F)	0.15% ±1 °C (±1 °F)
	mV	0.1%	0.15%
NTC	0.3%	0.7%	
Measurement Compensation	Thermocouple	Cold junction compensation	
	Pt100	Cable compensation for 2-wire, 3-wire and 4-wire	
	Pt1000	Cable compensation for 2-wire and 3-wire	
Output	Output Signal	Linearized 4-20 or 20-4 mA current, 2 wire	
	Resolution	2 µA	
Temperature Effect	±0.16% / 25 °C (77 °F)		
Response Time	Typical 1.6 sec		
Power Supply	10 to 35 Vdc		
Operating Conditions	Temperature	-40 to 85 °C (-40 to 185 °F)	
	Humidity	0 to 90% RH	
Approvals / Standards	CE NAMUR NE43 compliant RoHS compliant EN 61326-1: 2006 conformity		
Protection	Internal protection against reverse polarity		
Isolation	No electrical isolation between input and output		
Dimensions	43.5 mm (diameter) x 20.5 mm (height)   1.71 in (diameter) x 0.80 in (height)		
Wire Cross Section	0.14 to 1.5 mm <sup>2</sup> (26 AWG to 15 AWG)		
Housing Material	ABS UL94-HB (standard impact strength, flaming resistance and antistatic)		
Mounting	DIN form B sensor head		

For more information, contact us



**PT MULTI MAKMUR TEKNIKATAMA**

**p** (+62 21) 543 500 91  
 (+62 21) 543 500 92  
 (+62 21) 0811178954

**f** (+62 21) 543 501 82  
**e** rdn@cbn.net.id  
**w** multimakmur.co.id

